



Cynthia Furse
 Utah State University
 Dept. of Electrical &
 Computer Engineering
 4120 Old Main Hill
 Logan, UT 84322-4120
 (435) 797-2870
 (435) 7973054 (Fax)
 furse@hellos.ece.usu.edu (e-mail)

Applications of the Lambert W Function in Electromagnetics

David C. Jenn

Department of Electrical & Computer Engineering, Naval Postgraduate School
 Mail Code: EC/Jn, 1 University Circle, Monterey, CA 93943 USA
 Tel: +1 (831) 656-2254; E-mail: jenn@nps.navy.mil

Keywords: Functional analysis; capacitors; surface waves; Lambert function

1. Introduction

The Lambert W function, although not familiar to many engineers, has its origin in the work of Lambert and Euler in the late 1700s. $W(z)$ is the function that solves the equation

$$W(z)e^{W(z)} = z \quad (1)$$

where, in general, z is a complex number. Many of the equations encountered in electromagnetics can be cast into the form of Equation (1). Since most of the mathematics and engineering software packages have some variant of the W function included, many of the traditional graphical-solution methods can be eliminated, and the equations programmed efficiently in *Maple*, *Macysma*, *Mathematica*, or *Matlab*. (In *Mathematica*, W is the `ProductLog` function.)

Equation (1) is a multivalued function with an infinite number of solutions, most of them complex [1]. Thus, the notation $W_p(z)$ is used, where $p = 0, \pm 1, \pm 2, \dots$ denotes the branch. If z is real, which is often the case, then there may be

1. no solution
2. two real solutions, $W_0(z)$ and $W_{-1}(z)$
3. one real solution, $W_0(z)$ (with $W_{-1}(z)$ complex)

As stated in [2], even if z is real, the branches other than $p = 0$ and $p = -1$ are always complex.

Many other forms of Equation (1) can be derived [1]. For example, using the definition of the natural logarithm, the equation

$$xb^x = a \quad (2)$$

can be written as $x(e^{\ln b})^x = a$. Multiply both sides by $\ln b$ to get

$$(x \ln b) e^{x \ln b} = a \ln b \rightarrow_{x' = x \ln b} x' e^{x'} = a \ln b,$$

which is Equation (1) with $W(x')e^{W(x')} = a \ln b$. The solution for x is

$$x = W(a \ln b) / \ln b. \quad (3)$$

Two other forms of Equation (1) and their solutions are

$$x^{x^a} = b \rightarrow x = e^{W(a \ln b) / a} \quad (4)$$

$$a^x = x + b \rightarrow x = -b - W(-a^{-b} \ln a) / \ln a. \quad (5)$$

Several EM applications of the Lambert W function are given in the following sections.

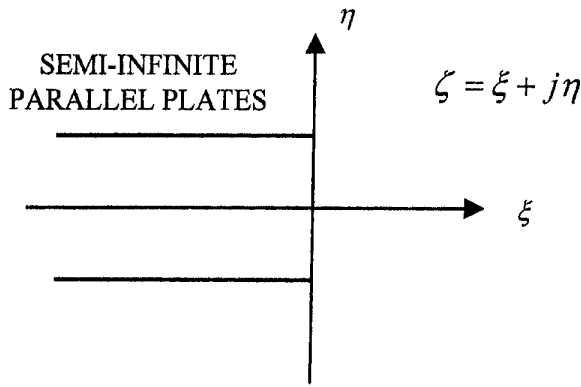


Figure 1a. The original problem: semi-infinite parallel plates at potentials $\pm V_0$.

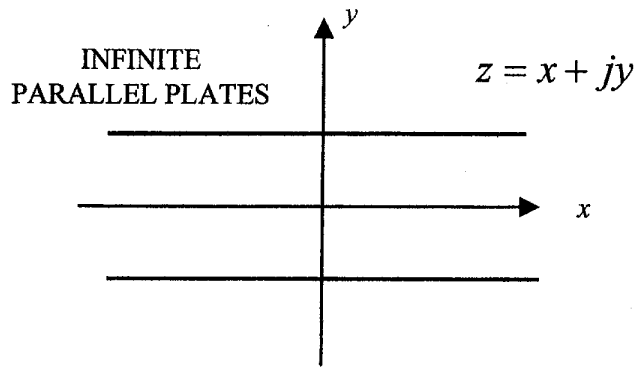


Figure 1b. The transformed problem: infinite parallel plates in the z plane.

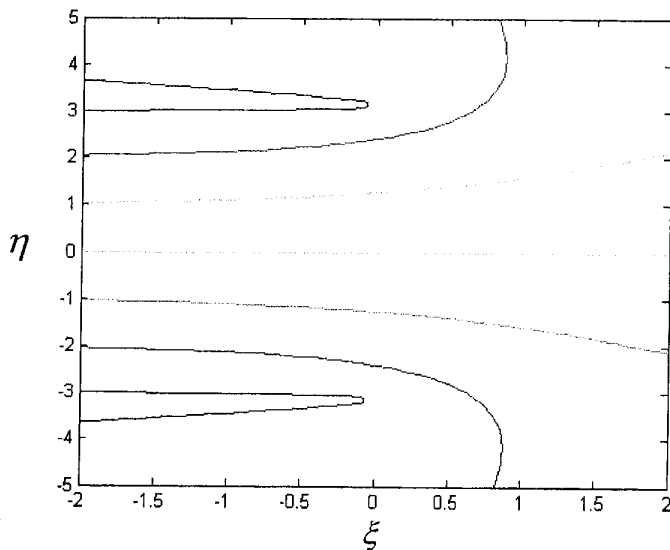


Figure 2. Equipotential lines of the parallel-plate capacitor with plates located at $\eta = \pm 3$.

2. Parallel Plate Capacitor

The Schwartz-Christoffel transformation provides a mapping of the interior of a closed polygon in the complex ζ plane to infi-

nite parallel plates in the z plane, as shown in Figure 1 [2, 3]. A conformal mapping of this type can be used to derive an approximate formula for the potential of the parallel plates, which includes the edge effect. The potential at points in the z plane is easily calculated, and transformed back to the ζ plane to generate equipotentials. Following the derivation in [2], the desired transformation is

$$\zeta = 1 + z + e^z.$$

In terms of the Lambert W function,

$$z = \zeta - 1 - W_{K(\zeta)}(e^{\zeta-1}),$$

where $K(\zeta) = \left\lceil \frac{\text{Im}(\zeta) - \pi}{2\pi} \right\rceil$, $\lceil \cdot \rceil$ signifies the ceiling function, and Im is the imaginary part. The potential at a point ζ is

$$V(\zeta) = \frac{V_0}{\pi} \text{Im} \left\{ \zeta - 1 - W_{K(\zeta)}(e^{\zeta-1}) \right\}. \quad (6)$$

Several equipotential contours are plotted in Figure 2.

3. Surface-Wave Transmission Lines

Surface-wave transmission lines were first investigated by Goubau in the 1950s [4]. He presented a set of curves that can be used to determine the propagation constant as a function of the conductor characteristics. For a circular conductor of radius a , conductivity σ_c , and permeability μ_c (Figure 3), he showed that for the conditions frequently encountered in practice,

$$\gamma a = 1.12 \sqrt{|\xi|} e^{j(\alpha + \pi)/2} \quad (7)$$

where

$$|\xi| \ln |\xi| = -|\eta|, \quad (8)$$

with

$$|\eta| = 2(0.89)^2 \frac{k^2 a \mu_c}{|k_c| \mu_0},$$

$$\alpha = -\frac{\pi}{4} \left(1 - \frac{1}{\ln |\xi| + 1} \right),$$

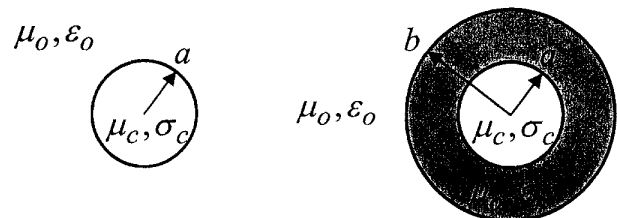


Figure 3. Cross sections of surface-wave transmission lines: a bare conductor (left), and a dielectric-coated conductor (right).

$$k_c = 1.12\sqrt{\omega\mu_c\sigma_c}e^{-j\pi/4},$$

$$k = \omega\sqrt{\varepsilon_0\mu_0},$$

$$\gamma^2 = k^2 - k_c^2.$$

The quantity $|\eta|$ is known from the conductor geometry and material parameters, and thus Equation (8) must be solved for $|\xi|$. In [4] the solution is done graphically, but Equation (8) can be recast into the form of Equation (4):

$$e^{\xi|\ln|\xi|} = e^{-|\eta|} \rightarrow (e^{\ln|\xi|})^{|\xi|} = e^{-|\eta|} \rightarrow |\xi|^{|\xi|} = e^{-|\eta|}.$$

The solution is $|\xi| = e^{W(-|\eta|)}$, and therefore $|\xi|$ can be determined by calculating W . The equations for the propagation constant can be solved without resorting to curves. Once γ is known, the attenuation constant and phase velocity can be determined. Figure 4 shows the loss in dB per 100 feet as a function of wire radius.

A similar approach can be used for a dielectric-coated conductor (also shown in Figure 3), where b is the radius of the outer surface of the dielectric layer, and ε_r the relative dielectric constant. This problem has been treated by Goubau [3], Harrington [5], Collin [6], and Balanis [7]. Using the notation of Balanis, the eigenequation for the attenuation constant becomes

$$\varepsilon_r b (\alpha_\rho^0)^2 \ln(0.89\alpha_\rho^0 b) \approx \left[-\beta_0^2 (\varepsilon_r - 1) + (\alpha_\rho^0)^2 \right] t, \quad (9)$$

where $\beta_0 = \omega\sqrt{\varepsilon_0\mu_0}$ and it has been assumed that $a \ll \lambda$, and that the thickness of the coating is $t = (b - a) \ll a$. Letting $x = 0.89\alpha_\rho^0 b$, Equation (9) takes the form

$$Bx^2 \ln x = A + x^2, \quad (10)$$

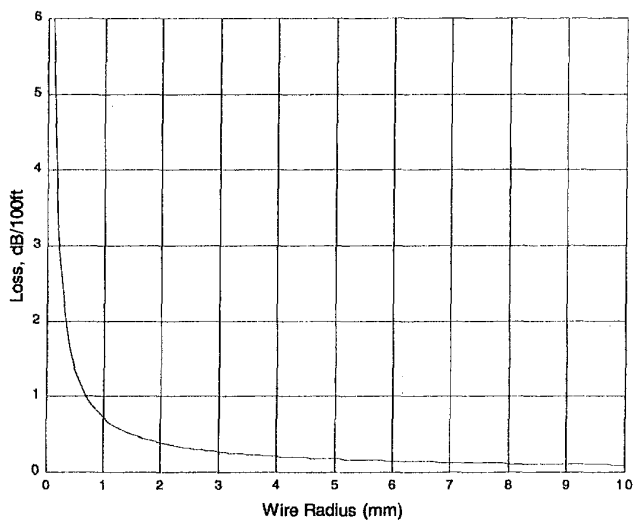


Figure 4. The attenuation in dB per 100 feet as a function of the wire radius (3 GHz).

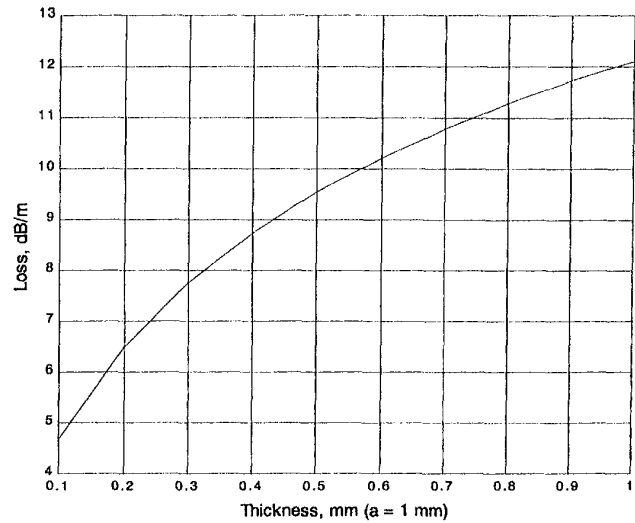


Figure 5. The attenuation of a coated conductor as a function of the coating thickness (3 GHz).

with $A = -(0.89b)^2 (\varepsilon_r - 1) \beta_0^2$ and $B = \frac{\varepsilon_r b}{t}$. Now, a series of transformations of variables is performed:

1. Let $y = \ln x$, ($x = e^y$), which gives $e^{2y}(y - 1/B) = A/B$;
2. Let $z = y - 1/B$, which gives $2ze^{2(z+1/B)} = 2A/B$;
3. Let $u = 2z$, which gives $ue^u = 2Ae^{-2/B}/B$.

The solution for u is $W(2Ae^{-2/B}/B)$, and the attenuation constant is $\alpha_\rho^0 = \frac{\exp(u+1/B)}{0.89b}$. Figure 5 shows the attenuation as a function of coating thickness for $\varepsilon_r = 2.56$ and $a = 0.001$ m at 300 MHz. As Balanis points out, increasing the dielectric thickness increases the attenuation constant, and binds the wave more tightly to the surface.

4. Summary

The solution to many EM problems can be formulated in terms of the Lambert W function. Several have been presented here. The function frequently occurs in the dispersion relations for transmission-line problems when the limiting cases of small radius or thickness are considered. Numerical algorithms of the function have been incorporated into the popular mathematical computation packages, which allows the efficient and rapid solution of problems that have traditionally been done graphically.

5. References

1. R. Corless, G. Gonnet, D. Hare, D. Jeffery and D. Knuth, "On the Lambert W function," *Advances in Computational Mathematics*, 5, 1996, pp. 329-359.

2. S. Valluri, D. Jeffery, and R. Corless, "Some Applications of the Lambert W Function to Physics," *Canadian Journal of Physics*, **8**, pp. 823-831.
3. K. Binns and P. Lawrenson, *Analysis and Computation of Electric and Magnetic Field Problems, Second Edition*, Oxford, Pergamon Press, 1973.
4. G. Goubau, "Single Conductor Surface Wave Transmission Lines," *Proc. IRE*, **39**, June, 1951, pp. 619-624.
5. R. Harrington, *Time-Harmonic Electromagnetic Fields*, New York, McGraw-Hill, 1961.
6. R. Collin, *Field Theory of Guided Waves*, New York, McGraw-Hill, 1960.
7. C. Balanis, *Advanced Engineering Electromagnetics*, New York, Wiley, 1989. ☎

AP-S Undergraduate Scholarship Awardees

Congratulations to the following students, who have been awarded the IEEE AP-S Undergraduate Scholarship (\$1000):

Mohammed Al-Qedra
American University of Sharajah
Major professor: Nasser Qaddoumi

Patrick Brown
North Carolina State University
Major Professor: Gianluca Lazzi

Andrey Nosich
Kharkov National University
Major Professor: Y. V. Gandel

Andrew Berezin
Worcester Polytechnic Institute
Major Professor: Sergey Makarov

AP-S Undergraduate Scholarships

\$1000 IEEE AP-S Undergraduate Scholarships are available. The application deadline is April 1 (hopefully, additional scholarships will also be available with a deadline of November 1: watch for more details). For more information, send an e-mail to:

furse@ece.usu.edu

Discount on MIT Advanced Study Program Courses

The Massachusetts Institute of Technology Advanced Study Program (MIT ASP) has become an IEEE Education Partner. As a result, IEEE members can now take graduate-level, credit courses provided by MIT at a 10% discount. Current ASP courses include Systems Dynamics, a 24-month certificate program, and Economic Concepts for Engineers, a semester-long course.

Offered over the Internet since 1995, the ASP is in its thirty-third year of providing courses to off-campus graduates. Taught by MIT faculty, the online delivery takes advantage of the latest in technologies for working engineers to keep pace with developments in their fields or to enlarge their knowledge base. Admission is based on the applicant's academic and professional background. Applications, course prerequisites, and systems requirements are detailed at the MIT-supplied Web site for IEEE members. Members must use their IEEE member number to receive the 10% discount. The site can be accessed via the IEEE Educational Partners site at <http://www.ieee.org/EduPartners> by choosing MIT from the university partners. More information about the IEEE Education Partners Program can be obtained by contacting Sasha Eydlin, IEEE Educational Activities, via e-mail at s.eydlin@ieee.org.

[Information for the above item was taken from an IEEE Educational Activities Board press release.] ☎

IEEE-USA E-zine Available

The IEEE-USA has announced the availability of *IEEE-USA TODAY*. This is a monthly "e-zine" (an electronic magazine, delivered via e-mail). It includes information on late-breaking news and services from IEEE-USA, as well as a message from the IEEE-USA President. It is available via a Web sign-up form at <http://ieeecsusa.org/emailupdates>.

[Information for the above item was taken from an IEEE-USA press release.] ☎